


WT1800 Battery Charger



Features

- Input Voltge:100-240Vac 47-63HZ
- Operating Tenperature:-10°C~~+50°C
- Charge Method: Constant Voltage / Constant Current / Floating Charge (CC/CV)
- Efficiency:>87%
- Product Size:280*125*100mm
- Warranty:3 years
- Case Material:PC UL94VO
- Input Material:"Red" charge, "green" full
- N.W:0.3kg
- Packge Type:Cartons 48*19*14cm
- Package Size:6pcs (98*48*14cm)
- Delivery Ti me:2-5working days
- Product standards: CE/ROHS/SAA

Iput Plug

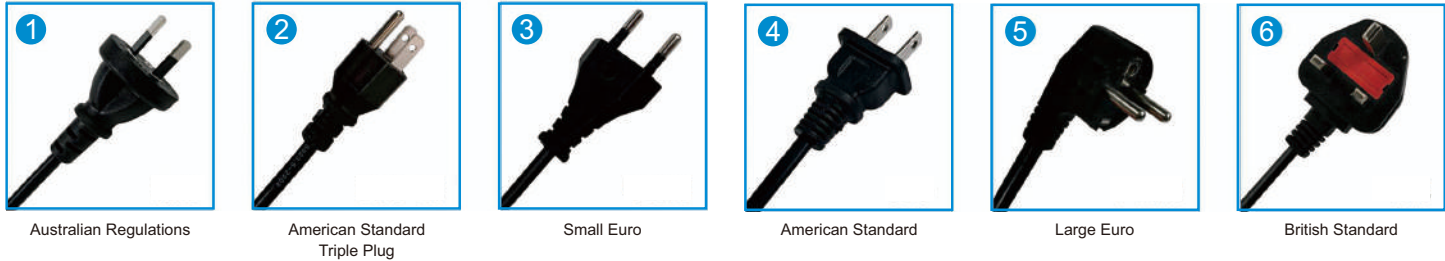

Output Plug



WT1800 Battery Charger



Specifications

Ltem No	Battery Vltage	Series	Charge Voltage	Charge Current
12V	12V Ternary Lithium Battery	3S	12.6V	60A
12V	12V Lead Acid Battery	1S	14.5V	60A
12V	12V Lifepo4Lithium Battery	4S	14.8V	60A
15V	14.8V Ternary Lithium Battery	4S	16.8V	40A
22.2V	22.2V Ternary Lithium Battery	5S	25.2V	40A
24V	24V Lead Acid Battery	2S	29V	40A
24V	24V Lifepo4Lithium Battery	8S	29.2V	40A
24V	24V Ternary Lithium Battery	7S	29.4V	40A
30V	29.6V(30V) Ternary Lithium Battery	8S	33.6V	40A
36V	36V Ternary Lithium Battery	10S	42V	30A
36V	36V Lead Acid Battery	3S	43.5V	30A
36V	36V(38.4V) Lifepo4Lithium Battery	12S	43.2V	30A
44.4V	44.4V Ternary Lithium Battery	12S	50.4V	30A
48V	48V Ternary Lithium Battery	13S	54.6V	30A
48V	48V(51.8V) Ternary Lithium Battery	14S	58.8V	30A
48V	48V(51.2V) Lifepo4Lithium Battery	16S	58.4V	30A
48V	48V Lead Acid Battery	4S	58V	30A
55.5V	55.5V Ternary Lithium Battery	15S	63V	30A
60V	60V Ternary Lithium Battery	16S	67.2V	20A
60V	60V(63V) Ternary Lithium Battery	17S	71.4V	20A
60V	60V Lead Acid Battery	5S	72.5V	20A
60V	60V(64V) Lifepo4Lithium Battery	20S	73V	20A
72V	72V Ternary Lithium Battery	20S	84V	20A
72V	72V(77.7V) Ternary Lithium Battery	21S	88.2V	20A
72V	72V Lead Acid Battery	6S	87V	20A
72V	72V(76.8V) Lifepo4Lithium Battery	24S	87.6V	20A
84V	72V(77.7V) Ternary Lithium Battery	23S	96.6V	15A
90V	88.8V Ternary Lithium Battery	24S	100V	154A
96V	96V Lifepo4Lithium Battery	8S	116V	15A

Adaptation



Ternary Lithium Battery



Lifepo4 Battery



Lead Acid Battery