


WT2400 Battery Charger



Features

- Input Voltge:100-240Vac 47-63HZ
- Operating Tenperature:-10°C~~+50°C
- Charge Method: Constant Voltage / Constant Current / Floating Charge (CC/CV)
- Efficiency:>87%
- Product Size:365\*125\*100mm
- Warranty:3 years
- Case Material:PC UL94VO
- Input Material:"Red" charge, "green" full
- N.W:0.3kg
- Packge Type:Cartons 48\*19\*14cm
- Package Size:12pcs (98\*48\*200cm)
- Delivery Ti me:2-5working days
- Product standards: CE/ROHS/SAA

Iput Plug

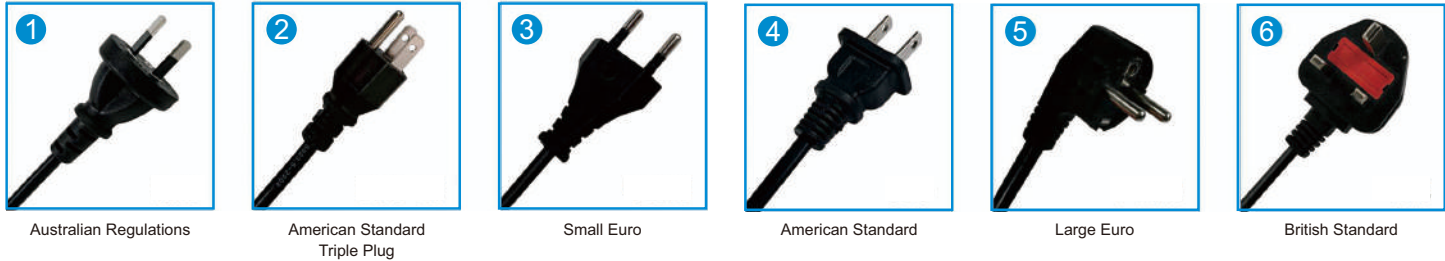

Output Plug



WT2400 Battery Charger



Specifications

| Ltem No | Battery Vltage                     | Series | Charge Voltage | Charge Current |
|---------|------------------------------------|--------|----------------|----------------|
| 3.7V    | 3.7V Ternary Lithium Battery       | 1S     | 4.2V           | 80A            |
| 6V      | 6V Lead Acid Battery               | 1S     | 7.2V           | 80A            |
| 7.4V    | 7.4V Ternary Lithium Battery       | 2S     | 8.4V           | 80A            |
| 12V     | 12V Ternary Lithium Battery        | 3S     | 12.6V          | 80A            |
| 12V     | 12V Lead Acid Battery              | 1S     | 14.5V          | 80A            |
| 12V     | 12V Lifepo4Lithium Battery         | 4S     | 14.8V          | 80A            |
| 15V     | 14.8V Ternary Lithium Battery      | 4S     | 16.8V          | 55A            |
| 22.2V   | 22.2V Ternary Lithium Battery      | 5S     | 25.2V          | 55A            |
| 24V     | 24V Lead Acid Battery              | 2S     | 29V            | 55A            |
| 24V     | 24V Lifepo4Lithium Battery         | 8S     | 29.2V          | 55A            |
| 24V     | 24V Ternary Lithium Battery        | 7S     | 29.4V          | 55A            |
| 30V     | 29.6V(30V) Ternary Lithium Battery | 8S     | 33.6V          | 55A            |
| 36V     | 36V Ternary Lithium Battery        | 10S    | 42V            | 40A            |
| 36V     | 36V Lead Acid Battery              | 3S     | 43.5V          | 40A            |
| 36V     | 36V(38.4V) Lifepo4Lithium Battery  | 12S    | 43.2V          | 40A            |
| 44.4V   | 44.4V Ternary Lithium Battery      | 12S    | 50.4V          | 40A            |
| 48V     | 48V Ternary Lithium Battery        | 13S    | 54.6V          | 40A            |
| 48V     | 48V(51.8V) Ternary Lithium Battery | 14S    | 58.8V          | 40A            |
| 48V     | 48V(51.2V) Lifepo4Lithium Battery  | 16S    | 58.4V          | 40A            |
| 48V     | 48V Lead Acid Battery              | 4S     | 58V            | 40A            |
| 55.5V   | 55.5V Ternary Lithium Battery      | 15S    | 63V            | 40A            |
| 60V     | 60V Ternary Lithium Battery        | 16S    | 67.2V          | 30A            |
| 60V     | 60V(63V) Ternary Lithium Battery   | 17S    | 71.4V          | 30A            |
| 60V     | 60V Lead Acid Battery              | 5S     | 72.5V          | 25A            |
| 60V     | 60V(64V) Lifepo4Lithium Battery    | 20S    | 73V            | 25A            |
| 72V     | 72V Ternary Lithium Battery        | 20S    | 84V            | 25A            |
| 72V     | 72V(77.7V) Ternary Lithium Battery | 21S    | 88.2V          | 25A            |
| 72V     | 72V Lead Acid Battery              | 6S     | 87V            | 25A            |
| 72V     | 72V(76.8V) Lifepo4Lithium Battery  | 24S    | 87.6V          | 25A            |
| 84V     | 84V(85.1V) Ternary Lithium Battery | 23S    | 96.6V          | 20A            |
| 84V     | 84V Lead Acid Battery              | 7S     | 101.5V         | 20A            |
| 96V     | 96V(63V) Lead Acid Battery         | 8S     | 116V           | 20A            |

Adaptation



Ternary Lithium Battery



Lifepo4 Battery



Lead Acid Battery